


ADMESH™ Specifications




Item	Data		Unit	Method
Yarn	1000 x 1000		Denier	DIN60001
Net Structure	12 x 12		Thread/Inch	DIN53853
Net Weight	110		g/sq. m	DIN53352
PVC Coated	150		g/sq. m	DIN53352
Product Weight	260		g/sq. m	DIN53352
Thickness	—		mm	DIN53353
Products Width	1.02 ~ 5.00		m	—
Tearing Strength	L	268	N/5cm	DIN53363
	W	270		
Tensile Strength	L	1045	N/5cm	DIN53354
	W	1050		
Elongation Value	L	26	%	DIN53354
	W	26		
Peeling Strength	1017		N/5cm	DIN53357
Light Transmission	—		%	ASTM D 1003
Temperature	-30°C ~ +70°C		°C	DIN53372
Expired Time	6~ 12 months		—	—
Flame Retardant	Pass			DIN75200
Anti-wicking	Without			
Anti-frost	Without			
Anti-mildew	Without			
Acrylic Lacquer	Without			

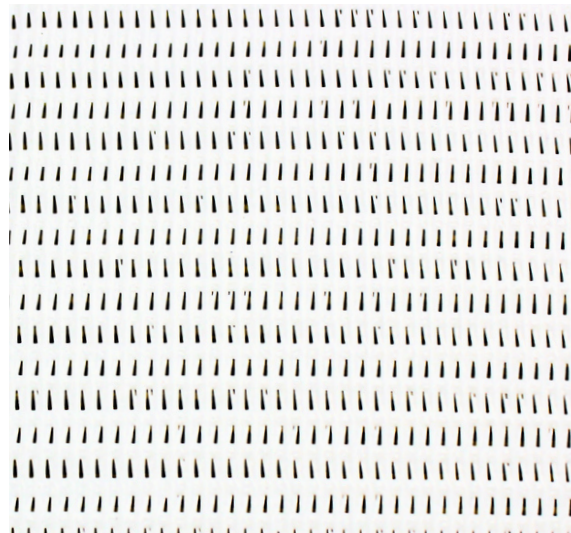

30% VISIBILITY
(Recommended)

Item	Data		Unit	Method
Yarn	1000 x 1000		Denier	DIN60001
Net Structure	18 x 9		Thread/Inch	DIN53853
Net Weight	130		g/sq. m	DIN53352
PVC Coated	160		g/sq. m	DIN53352
Product Weight	290		g/sq. m	DIN53352
Thickness	—		mm	DIN53353
Products Width	1.02 ~ 5.00		m	—
Tearing Strength	L	415	N/5cm	DIN53363
	W	620		
Tensile Strength	L	935	N/5cm	DIN53354
	W	1683		
Elongation Value	L	26	%	DIN53354
	W	26		
Peeling Strength	1017		N/5cm	DIN53357
Light Transmission	—		%	ASTM D 1003
Temperature	-30°C ~ +70°C		°C	DIN53372
Expired Time	6~ 12 months		—	—
Flame Retardant	Pass			DIN75200
Anti-wicking	Without			
Anti-frost	Without			
Anti-mildew	Without			
Acrylic Lacquer	Without			

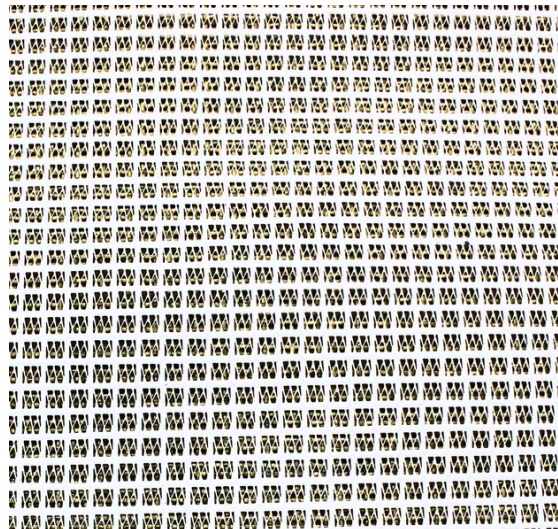

70% VISIBILITY