


ADMESH™ Specifications




Item	Data	Unit	Method
Yarn	1000 x 1000	Denier	DIN60001
Net Structure	18 x 9	Thread/Inch	DIN53853
Net Weight	130	g/sq. m	DIN53352
PVC Coated	160	g/sq. m	DIN53352
Product Weight	290	g/sq. m	DIN53352
Thickness	—	mm	DIN53353
Products Width	1.02 ~ 5.00	m	—
Tearing Strength	L 415	N/5cm	DIN53363
	W 620		
Tensile Strength	L 935	N/5cm	DIN53354
	W 1683		
Elongation Value	L 26	%	DIN53354
	W 26		
Peeling Strength	1017	N/5cm	DIN53357
Light Transmission	—	%	ASTM D 1003
Temperature	-30°C ~ +70°C	°C	DIN53372
Expired Time	6~ 12 months		—
Flame Retardant	Pass		DIN75200
Anti-wicking	Without		
Anti-frost	Without		
Anti-mildew	Without		
Acrylic Lacquer	Without		

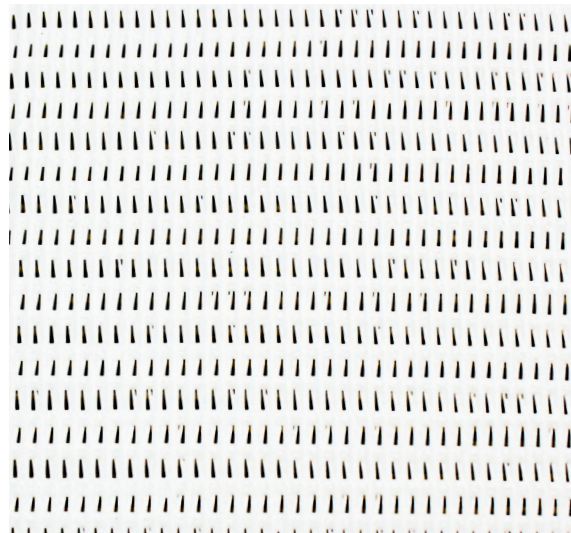

30% VISIBILITY
(Recommended)

Item	Data	Unit	Method
Yarn	1000 x 1000	Denier	DIN60001
Net Structure	12 x 12	Thread/Inch	DIN53853
Net Weight	110	g/sq. m	DIN53352
PVC Coated	150	g/sq. m	DIN53352
Product Weight	260	g/sq. m	DIN53352
Thickness	—	mm	DIN53353
Products Width	1.02 ~ 5.00	m	—
Tearing Strength	L 268	N/5cm	DIN53363
	W 270		
Tensile Strength	L 1045	N/5cm	DIN53354
	W 1050		
Elongation Value	L 26	%	DIN53354
	W 26		
Peeling Strength	1017	N/5cm	DIN53357
Light Transmission	—	%	ASTM D 1003
Temperature	-30°C ~ +70°C	°C	DIN53372
Expired Time	6~ 12 months		—
Flame Retardant	Pass		DIN75200
Anti-wicking	Without		
Anti-frost	Without		
Anti-mildew	Without		
Acrylic Lacquer	Without		

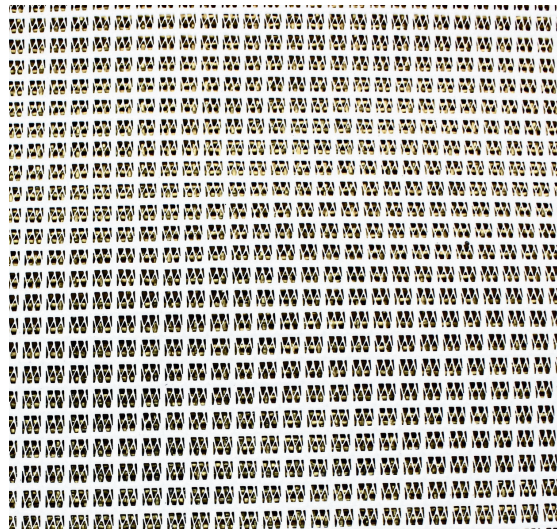

70% VISIBILITY